
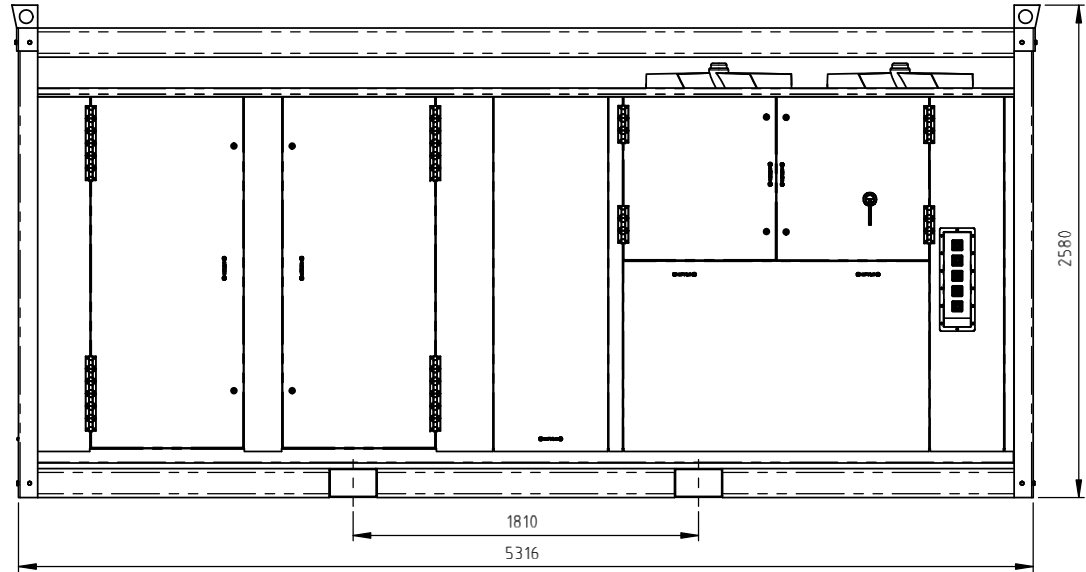
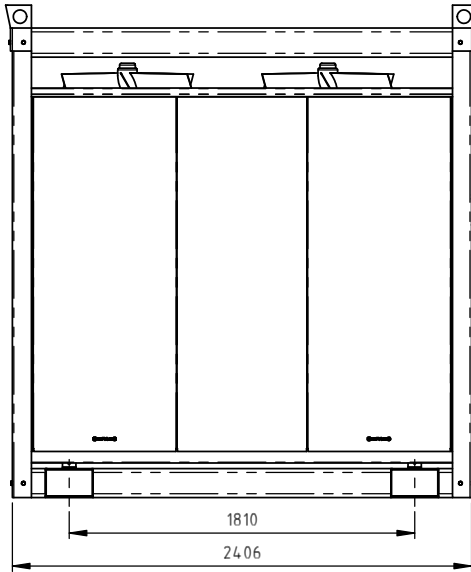





						PART NUMBER: TBA						
						UNLESS OTHERWISE STATED ALL DIMENSIONS IN mm	MATERIAL:				DRAWN J.DANKS	
											DATE 12/04/13	
						TOLERANCES	FINISH:	CHECKED		TITLE: 200kw DX UNIT		
						0 TO 20mm ±0.10		DATE		PRODUCTION DRAWINGS		
						LINEAR: 20 to 100mm ±0.15 100mm ±0.25						
0	ISSUED FOR INFORMATION	J.D	12/04/13			ANGULAR: ±0°30"		SALES ORDER		A3 SHEET	DRAWING No. AHU-005	REV 0
No.	DESCRIPTION	BY	DATE		PRINTS TO	DO NOT SCALE DRAFTING STANDARD BS 8888				SCALE: 1:20	CONT ON SHEET 1	SH No. 1
REVISION												

200kw DX - UNIT SPECIFICATION	
POWER REQUIREMENTS	3PH 200A RUNNING@ 205A/PH
ELECTRICAL	POWERLOCK FITTED, 3PH 200AMP ON HEATING AND 3PH 160AMP ON COOLING.
CABLE	N/A
LENGTH (MM)	6000
WIDTH (MM)	2440
HEIGHT (MM)	2590
WEIGHT (KG)	3500
FUEL	N/A
CAN BE USED WITH:	MULTIPLE CONFIGURATIONS
OPERATING TEMPERATURE	-18 °C + 58 °C
OPERATING CAPACITY	COOLING = 200kw, HEATING = 275kw
FLOW RATES	N/A
AIR FLOW	38350m ³ /h 600PA
NOTES	

						PART NUMBER: TBA						
						UNLESS OTHERWISE STATED ALL DIMENSIONS IN mm	MATERIAL:				DRAWN J.DANKS	
											DATE 12/04/13	
						TOLERANCES 0 TO 20mm ±0.10 LINEAR: 20 to 100mm ±0.15 100mm ±0.25 ANGULAR: ±0°30"	FINISH:				CHECKED	TITLE: 200kw DX UNIT
0	ISSUED FOR INFORMATION	J.D	12/04/13						DATE	PRODUCTION DRAWINGS		
No.	DESCRIPTION	BY	DATE		PRINTS TO	DO NOT SCALE DRAFTING STANDARD BS 8888		SALES ORDER	A3 SHEET	DRAWING No. AHU-005	REV 0	
REVISION									SCALE: 1:20	CONT ON SHEET 1	SH No. 1	